



# Bravo Access Floors

FS1500 PANEL - 24"

**PANEL VIEWS:**

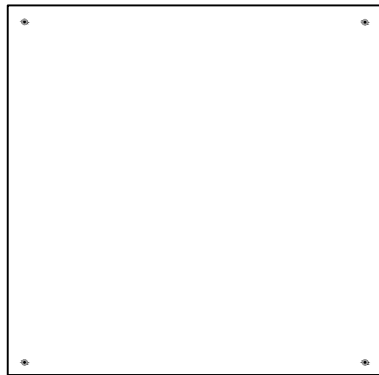


**TOP VIEW**

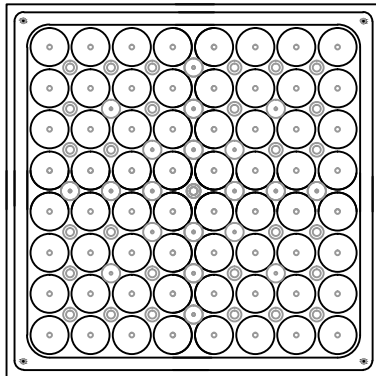


**BOTTOM VIEW**


**FINISH (CHECK ONE) :**

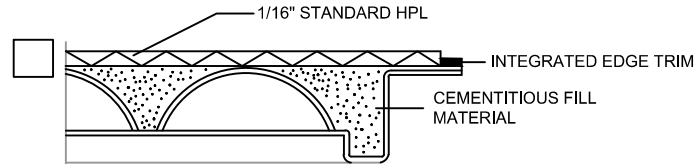


**CORNER SECTION - 1/16" HPL WITH INTEGRATED TRIM**

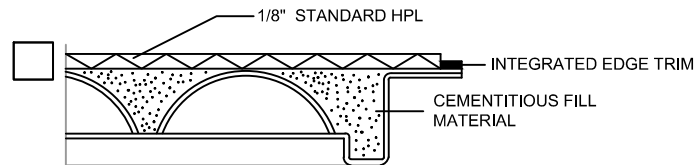

**CORNER SECTION - 1/8" HPL WITH INTEGRATED TRIM**

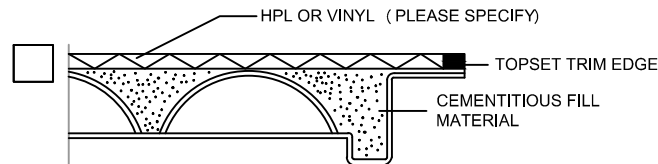

**CORNER SECTION - TOPSET TRIM EDGE**

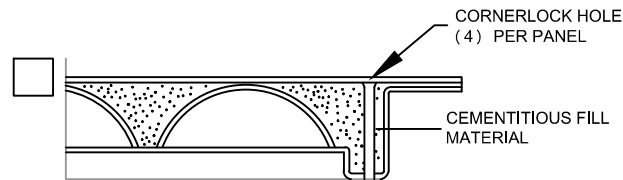

**CORNER SECTION - BARE CORNERLOCK**

**FEATURES:**

**CONSTRUCTION** - PANELS ARE CONSTRUCTED FROM A FORMED STEEL BOTTOM PAN WITH 64 FULL-DEPTH DOMES. THE FLAT STEEL TOP SHEET IS RESISTANCE WELDED TO THE BOTTOM PAN IN 100 LOCATIONS. FULL-DEPTH CORNERS PROVIDE STRENGTH WHERE OTHER PANELS ARE WEAKEST.

**STRONG** - THE STEEL SHELL IS COATED WITH CONDUCTIVE EPOXY PAINT THAT IS THERMALLY HARDENED INTO AN ATTRACTIVE DURABLE FINISH. THE SMOOTH FINISH IS A PERFECT SURFACE FOR FACTORY-APPLIED FLOOR COVERINGS, IF REQUIRED.

**PERFORMANCE** - THE FILLED STEEL PANEL HAS HIGH STATIC AND DYNAMIC LOAD CARRYING ABILITY WITH A VERY HIGH MARGIN OF SAFETY IN THE EVENT OF AN ACCIDENTAL OVERLOAD.

**STRENGTH / WEIGHT** - THE DESIGN AND MANUFACTURING TECHNOLOGY IN THE SYSTEM PROVIDE FOR A SYSTEM DEADLOAD OF ONLY 9 TO 14 LBS PER SQUARE FOOT AND PANELS THAT CAN EASILY BE REMOVED WITH A SIMPLE SUCTION CUP LIFTER AND CARRIED WITH ONE HAND.

**FS1500 PANEL LOADING CHART**

LOAD TYPE:	POUNDS:	METRIC:
CONCENTRATED	1500 LBS.	6672 N.
UNIFORM	375 LBS.	1668 N.
ULTIMATE	4500 LBS.	20 KN.
IMPACT	150 LBS.	68 KG.
ROLLING LOAD ( 10 PASS)	1250 LBS.	5560 P.N.
ROLLING LOAD ( 10,000 PASS)	1000 LBS.	4448 P.N.
SAFETY FACTOR	PASS	PASS