



# Bravo Access Floors

## HS1000 PANEL - 24"

### PANEL VIEWS:

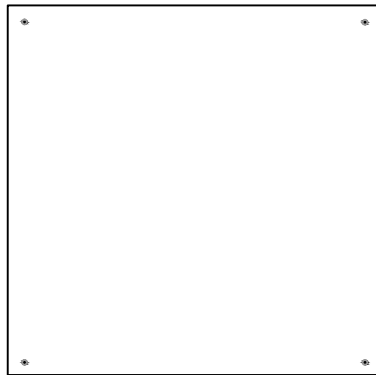


TOP VIEW

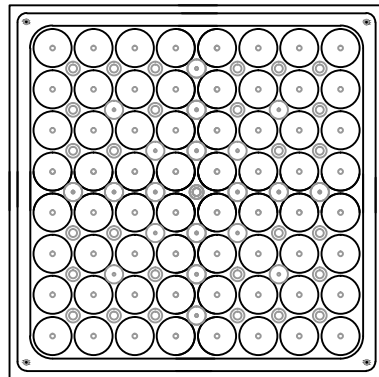


BOTTOM VIEW


### FINISH (CHECK ONE) :

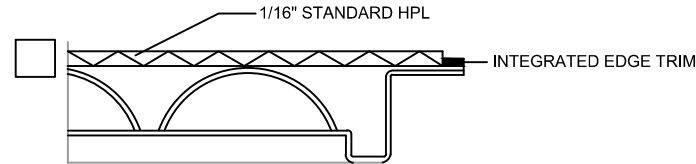


CORNER SECTION - 1/16" HPL WITH INTEGRATED TRIM

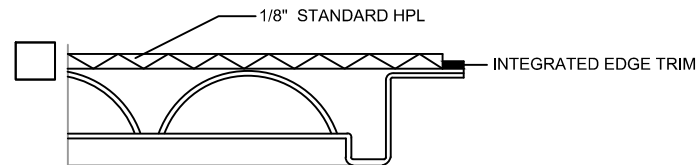

CORNER SECTION - 1/8" HPL WITH INTEGRATED TRIM

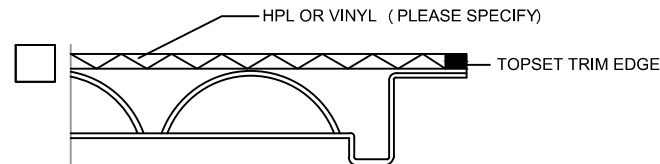

CORNER SECTION - TOPSET TRIM EDGE

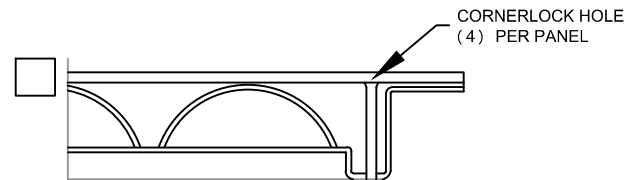

CORNER SECTION - BARE CORNERLOCK

### FEATURES:

**CONSTRUCTION** - PANELS ARE CONSTRUCTED FROM A FORMED STEEL BOTTOM PAN WITH 64 FULL-DEPTH DOMES. THE FLAT STEEL TOP SHEET IS RESISTANCE WELDED TO THE BOTTOM PAN IN 100 LOCATIONS. FULL-DEPTH CORNERS PROVIDE STRENGTH WHERE OTHER PANELS ARE WEAKEST.

**STRONG** - THE STEEL SHELL IS COATED WITH CONDUCTIVE EPOXY PAINT THAT IS THERMALLY HARDENED INTO AN ATTRACTIVE DURABLE FINISH. THE SMOOTH FINISH IS A PERFECT SURFACE FOR FACTORY-APPLIED FLOOR COVERINGS, IF REQUIRED.

**PERFORMANCE** - THE FILLED STEEL PANEL HAS HIGH STATIC AND DYNAMIC LOAD CARRYING ABILITY WITH A VERY HIGH MARGIN OF SAFETY IN THE EVENT OF AN ACCIDENTAL OVERLOAD.

**STRENGTH / WEIGHT** - THE DESIGN AND MANUFACTURING TECHNOLOGY IN THE SYSTEM PROVIDE FOR A SYSTEM DEADLOAD OF ONLY 9 TO 14 LBS PER SQUARE FOOT AND PANELS THAT CAN EASILY BE REMOVED WITH A SIMPLE SUCTION CUP LIFTER AND CARRIED WITH ONE HAND.

### HS1000 PANEL LOADING CHART

| LOAD TYPE:                  | POUNDS:   | METRIC:   |
|-----------------------------|-----------|-----------|
| CONCENTRATED                | 1000 LBS. | 4448 N.   |
| UNIFORM                     | 250 LBS.  | 1112 N.   |
| ULTIMATE                    | 3100 LBS. | 13.79 KN. |
| IMPACT                      | 125 LBS.  | 56.7 KG.  |
| ROLLING LOAD ( 10 PASS)     | 500 LBS.  | 2224 P.N. |
| ROLLING LOAD ( 10,000 PASS) | 500 LBS.  | 2224 P.N. |
| SAFETY FACTOR               | 3.1       | 3.1       |

Bravo Access Floors  
7079 Brookdale Drive  
Elkridge, Maryland 21075  
Phone: (410) 799-8286 Fax: (410) 799-0459

Bravo - Designed for Global Duty; Built on a Global Platform since 1989.

*Features and specifications are subject to change without notice.*