



# Bravo Access Floors

## SC1000 PANEL - 24"

**PANEL VIEWS:**

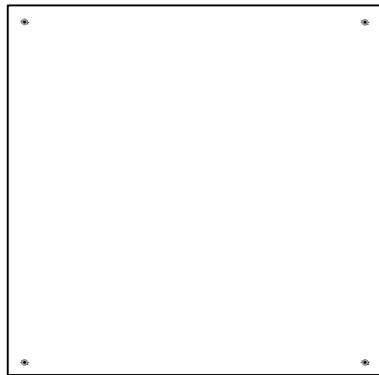


**TOP VIEW**

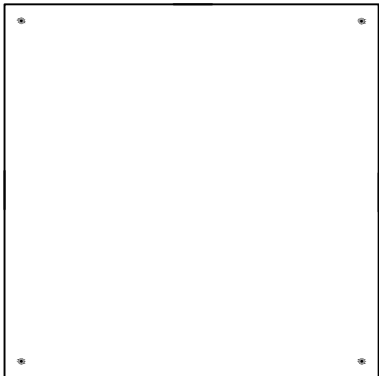


**BOTTOM VIEW**


**FINISH ( CHECK ONE ) :**

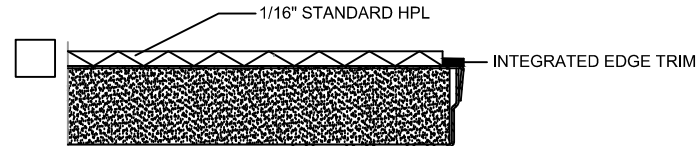


**CORNER SECTION - 1/16" HPL WITH INTEGRATED TRIM**

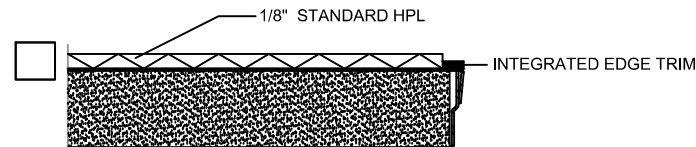

**CORNER SECTION - 1/8" HPL WITH INTEGRATED TRIM**

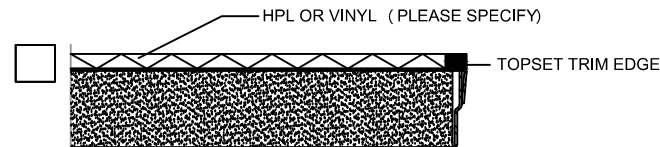

**CORNER SECTION - TOPSET TRIM EDGE**

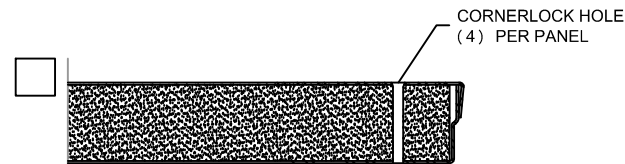

**CORNER SECTION - BARE CORNERLOCK**

**FEATURES:**

**STRONG** - HIGH DENSITY COMPOSITE CORE ENCAPSULATED BY HOT DIPPED GALVANIZED SHEET METAL. THE UNIFORM THICKNESS OF THE WOODCORE PANEL PROVIDES INCREASED DYNAMIC LOAD CAPACITY.

**FINISH** - PANELS ARE AVAILABLE IN A WIDE RANGE OF FINISHES. BARE PANELS COME IN FORMED HOT DIPPED GALVANIZED STEEL FINISH TO PROTECT AGAINST ZINC WHISKERING.

**DURABLE** - HEAVY DUTY DYNAMIC ROLLING LOAD, ULTIMATE IMPACT AND STATIC LOAD PERFORMANCE, ONE OF THE HIGHEST AVAILABLE IN THE INDUSTRY.

**STRENGTH / WEIGHT** - HIGH STRENGTH TO WEIGHT RATIO MEETS OSHA 50LB GUIDELINES FOR SINGLE WORKER LIFTING.

**FLEXIBLE** - ALL PANELS ARE SUITABLE FOR USE ON MOST OF OUR UNDERSTRUCTURE SYSTEMS.

**SC1000 PANEL LOADING CHART**

| LOAD TYPE:                  | POUNDS:   | METRIC:   |
|-----------------------------|-----------|-----------|
| CONCENTRATED                | 1000 LBS. | 4448 N.   |
| UNIFORM                     | 450 LBS.  | 2001 N.   |
| ULTIMATE                    | 4000 LBS. | 17.79 KN. |
| IMPACT                      | 125 LBS.  | 56.7 KG.  |
| ROLLING LOAD ( 10 PASS)     | 1000 LBS. | 4448 P.N. |
| ROLLING LOAD ( 10,000 PASS) | 800 LBS.  | 3558 P.N. |
| SAFETY FACTOR               | 3         | 3         |