



Bravo Access Floors

AF1000 PANEL - 24"

PANEL VIEWS:

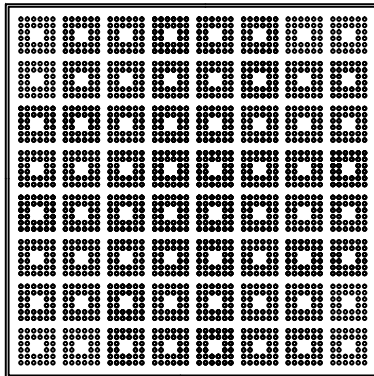


TOP VIEW

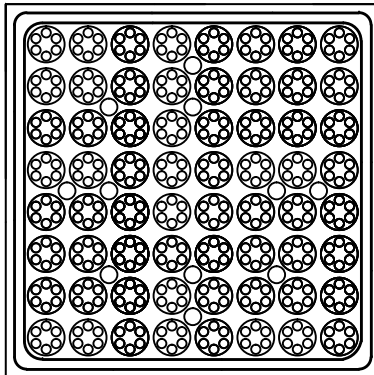


BOTTOM VIEW


FINISH (CHECK ONE) :

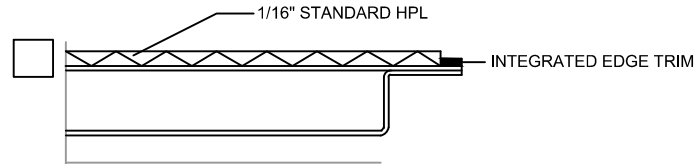

CORNER SECTION - 1/16" HPL WITH INTEGRATED TRIM

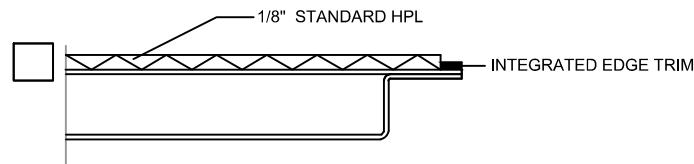

CORNER SECTION - 1/8" HPL WITH INTEGRATED TRIM

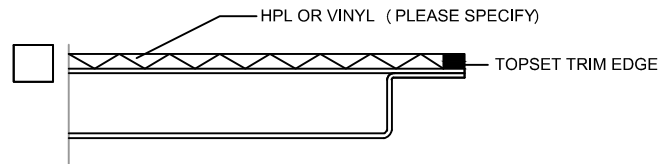

CORNER SECTION - TOPSET TRIM EDGE

DAMPER OPTIONS:

- NO DAMPER
- WITH DAMPER

FEATURES:

CONSTRUCTION - PANELS ARE CONSTRUCTED FROM A FORMED STEEL BOTTOM PAN WITH 64 FULL-DEPTH DOMES. THE FLAT STEEL TOP SHEET IS RESISTANCE WELDED TO THE BOTTOM PAN IN 100 LOCATIONS. FULL-DEPTH CORNERS PROVIDE STRENGTH WHERE OTHER PANELS ARE WEAKEST.

STRONG - THE STEEL SHELL IS COATED WITH CONDUCTIVE EPOXY PAINT THAT IS THERMALLY HARDENED INTO AN ATTRACTIVE DURABLE FINISH. THE SMOOTH FINISH IS A PERFECT SURFACE FOR FACTORY-APPLIED FLOOR COVERINGS, IF REQUIRED.

PERFORMANCE - THE STEEL PANEL HAS HIGH STATIC AND DYNAMIC LOAD CARRYING ABILITY WITH A VERY HIGH MARGIN OF SAFETY IN THE EVENT OF AN ACCIDENTAL OVERLOAD.

STRENGTH / WEIGHT - THE DESIGN AND MANUFACTURING TECHNOLOGY IN THE SYSTEM PROVIDE FOR A SYSTEM DEADLOAD OF ONLY 9 TO 14 LBS PER SQUARE FOOT AND PANELS THAT CAN EASILY BE REMOVED WITH A SIMPLE SUCTION CUP LIFTER AND CARRIED WITH ONE HAND.

AF1000 PERFORATED PANELS

STATIC PRESSURE	CFM WITH DAMPER	CFM WITHOUT DAMPER
0.1	474	643
0.2	657	909
0.3	812	1412
0.4	937	1279
0.5	1045	1401